

FEATURES

- Field-Bus remote data acquisition
- RS-485 Master/Slave communication type
- MODBUS RTU/ASCII
- 4 channel output
- Voltage or Current configurable outputs
- Watch-Dog Alarm
- Remotely Configurable
- 2000 Vac 3-way Galvanic Isolation
- High Accuracy
- EMC compliance – CE mark
- DIN rail suitable mounting - EN-50022 compliance



GENERAL DESCRIPTION

The SS 3024 device generates up to 4 output analog signals from digital commands. Data values are transmitted with MODBUS RTU/ASCII protocol on the RS-485 network (RS-232 interface is available).
 It is possible to generate voltage signals up to 10V and current signals up to 20mA, both active or passive loops.
 By means of a 16 bit converter, the device guarantee a high accuracy and a stable measure versus time and temperature.
 To ensure the plant safety, two Watch-Dog timer alarms are provided.
 The 2000 Vac isolation between input, power supply and serial line removes undesired ground-loop effects, allowing the use of the device even in the heavy environmental conditions.
 SS 3024 is in compliance with the 89/336/CEE directive on the electromagnetic compatibility.
 The device is housed in a rough selfextinguishing plastic container which, thanks to its thin profile of 17.5mm only, allows a high density mounting on EN-50022 standard DIN rail.

COMMUNICATION PROTOCOLS

The SS3024 is designed to work with the MODBUS RTU/ASCII protocol: standard protocol in field-bus; allows to directly interface SS3000 series devices to the larger part of PLCs and SCADA applications available on the market.
 For the protocol instructions, see the relative User Guide.

USER INSTRUCTIONS

Before to install the device, please read the "Installation Instruction" section.
 If the module configuration is unknown, it can be hardly to establish a communication with them; connecting the INIT terminal to the GND terminal (ground), at the next power-up the device will be autoconfigured in the default settings (see Operating User Guide).
 Connect power supply, serial bus and analog outputs as shown in the "Wiring" section.
 The "PWR" LED state depending to the working condition of the device: see the "Light Signaling" section to verify the device working state.
 To perform configuration and calibration operations, read the instructions in the Operating User Guide.
 To simplify handling or replacing of the device, it is possible to remove the wired terminals even with the device powered.

TECHNICAL SPECIFICATIONS (Typical @ 25 °C and in the nominal conditions)

Output type	Min	Max	Auxiliary Voltage 12V @ 20mA (4 channels)		Power Supply																	
Voltage V	0 V	+10 V	Rise time Analog output Slew-rate (independent programming for each channel)		Supply Voltage	18 .. 30 Vdc																
Current mA	0 mA	+20 mA			Current consumption	30 mA @ 24 Vdc 100 mA max																
Output calibration			<table border="1"> <thead> <tr> <th>Voltage V/s</th> <th>Current mA/s</th> </tr> </thead> <tbody> <tr><td>0,125</td><td>0,250</td></tr> <tr><td>0,250</td><td>0,500</td></tr> <tr><td>0,500</td><td>1,000</td></tr> <tr><td>1,000</td><td>2,000</td></tr> <tr><td>2,000</td><td>4,000</td></tr> <tr><td>4,000</td><td>8,000</td></tr> <tr><td>Immediate</td><td>Immediate</td></tr> </tbody> </table>		Voltage V/s	Current mA/s	0,125	0,250	0,250	0,500	0,500	1,000	1,000	2,000	2,000	4,000	4,000	8,000	Immediate	Immediate	Polarity inversion protection	60 Vdc max
Voltage V/s	Current mA/s																					
0,125	0,250																					
0,250	0,500																					
0,500	1,000																					
1,000	2,000																					
2,000	4,000																					
4,000	8,000																					
Immediate	Immediate																					
Voltage	±10 mV		Isolation		Input – RS485	2000 Vac 50 Hz, 1 min.																
Current	±20 µA				Supply – Input	2000 Vac 50 Hz, 1 min.																
Load resistance					Supply – RS485	2000 Vac 50 Hz, 1 min.																
Voltage	> 5 KΩ				Temperature & Humidity																	
Current	< 500 Ω				Operating temperature	-10°C .. +60°C																
Thermal drift					Storage temperature	-40°C .. +85°C																
Full scale	100 ppm max				Humidity (non condensing)	0 .. 90 %																
			Data Transmission		Housing																	
			Baud Rate	115.2 Kbps	Material	Selfextinguishing plastic																
			Max distance	1.2 Km	Mounting	EN-50022 DIN rail																
					Weight	~ 150 g.																
					EMC																	
					Immunity	EN 61000-6-2																
					Emission	EN 61000-6-4																

INSTALLATION INSTRUCTIONS

The SS 3024 device is suitable for fitting to DIN rails in the vertical position. For optimum operation and long life follow these instructions:

When the devices are installed side by side it may be necessary to separate them by at least 5 mm in the following case:


- If panel temperature exceeds 45°C and at least one of the overload conditions exist.
 - If panel temperature exceeds 35°C and at least two of the overload conditions exist.
- The overload conditions are the following:
- High supply voltage: >27Vdc
 - Use of the auxiliary power supply

Make sure that sufficient air flow is provided for the device avoiding to place raceways or other objects which could obstruct the ventilation slits. Moreover it is suggested to avoid that devices are mounted above appliances generating heat; their ideal place should be in the lower part of the panel.

Install the device in a place without vibrations.

Moreover it is suggested to avoid routing conductors near power signal cables (motors, induction ovens, inverters etc...) and to use shielded cable for connecting signals.


CABLING

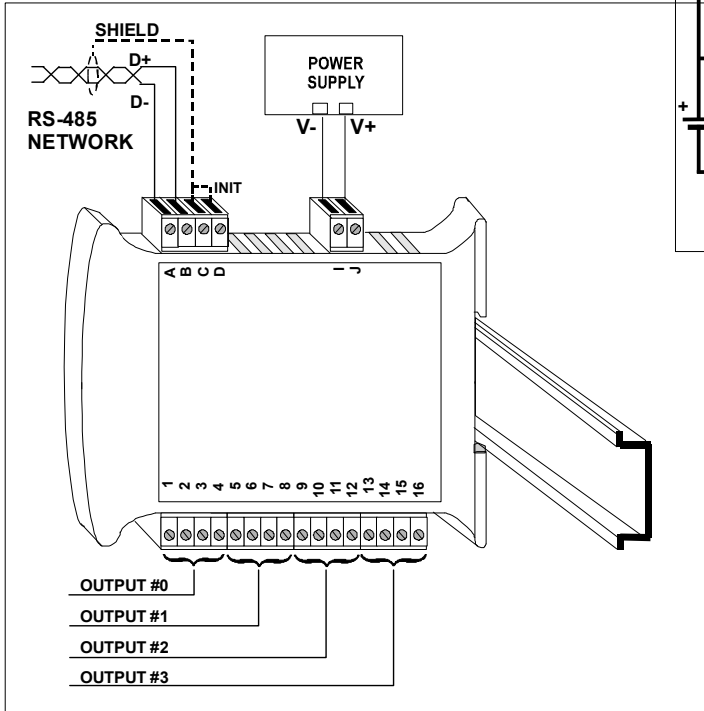

LIGHT SIGNALING




LED	COLOUR	STATE	DESCRIPTION
PWR	GREEN	ON	Device powered
		OFF	Device not powered / Wrong RS-485 cabling.
		FAST BLINK	Communication in progress (blink frequency depends to baud-rate)
		1 second BLINK	Watch-Dog Alarm condition

MECHANICAL DIMENSIONS (mm)

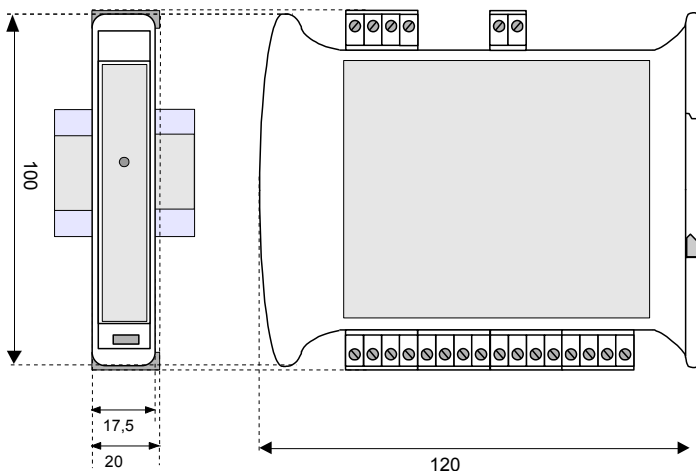


WIRING


ANALOG OUTPUT WIRING

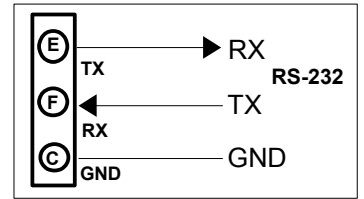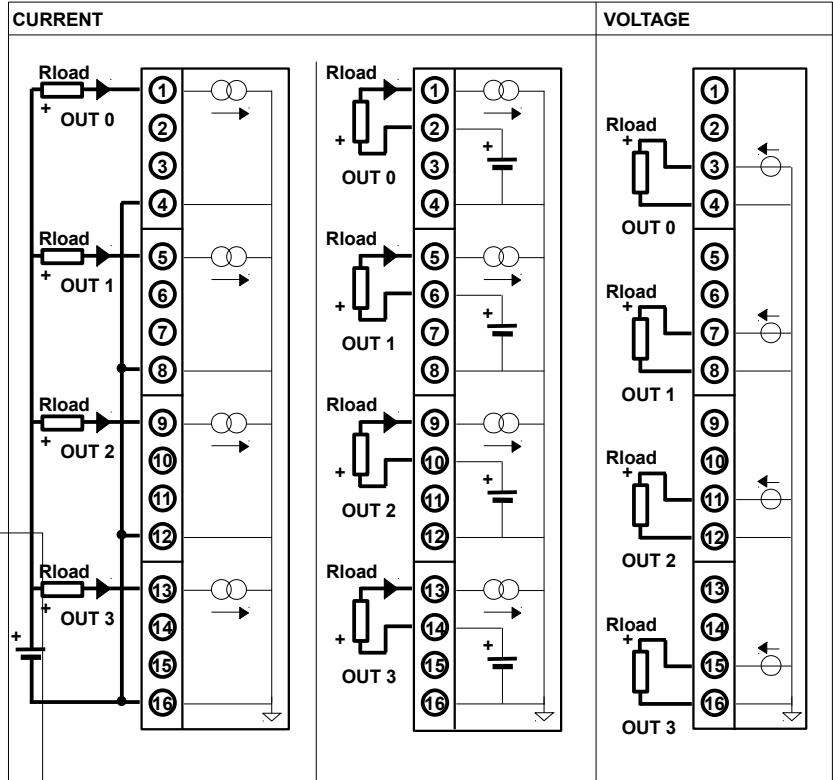


POWER SUPPLY WIRING

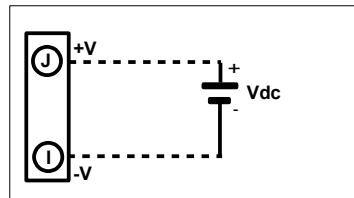

INIT WIRING



ISOLATION DIAGRAM

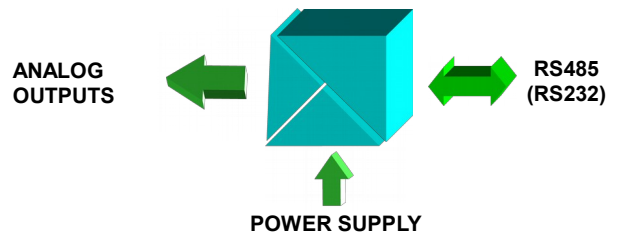

HOW TO ORDER

In the order phase, it is mandatory to specify the interface type (RS485 or RS232). SS3024 can be supplied with the configuration specified by the customer. Please refer to the "Technical Specification" section for the output type available.

ORDER CODE:

SS 3024 / M / 485 / mA

Protocol type
M: MODBUS protocol.

Interface type
485 : RS-485
232 : RS-232

Output type

■ = Requested
□ = Optional